


WALL TO FABRICATED FLOOR


PERIMETER WALL
TO FLOOR

OPTIONAL N.S.F. COVERED FLOOR
IS SHOWN

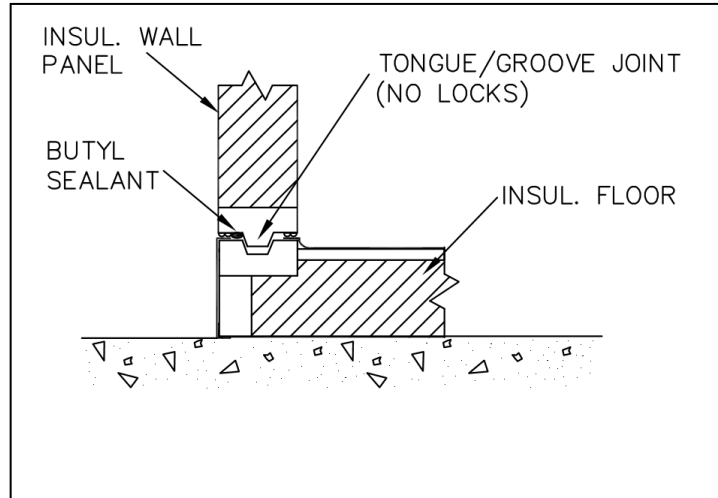

PARTITION WALL
TO FLOOR

OPTIONAL N.S.F. COVERED FLOOR
IS SHOWN

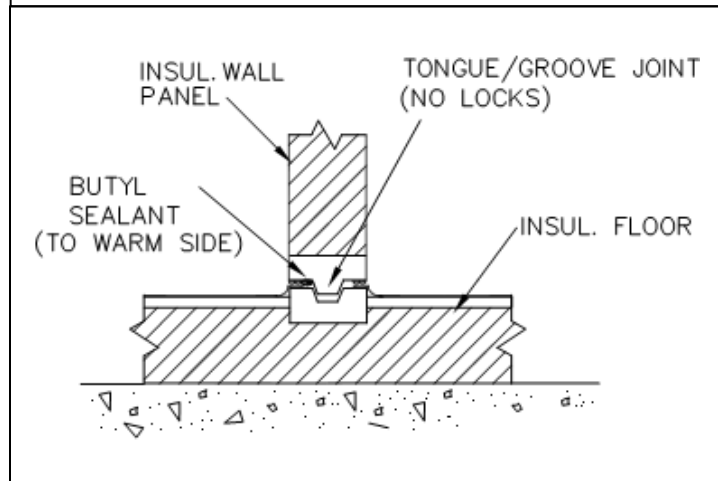


WALL AT RECESSED FLOOR

RECESS IN FLOOR SHOULD EQUAL
FLOOR THICKNESS - 4 1/4"

OPTIONAL N.S.F. COVERED FLOOR
IS SHOWN

INTERIOR APPLICATIONS ONLY

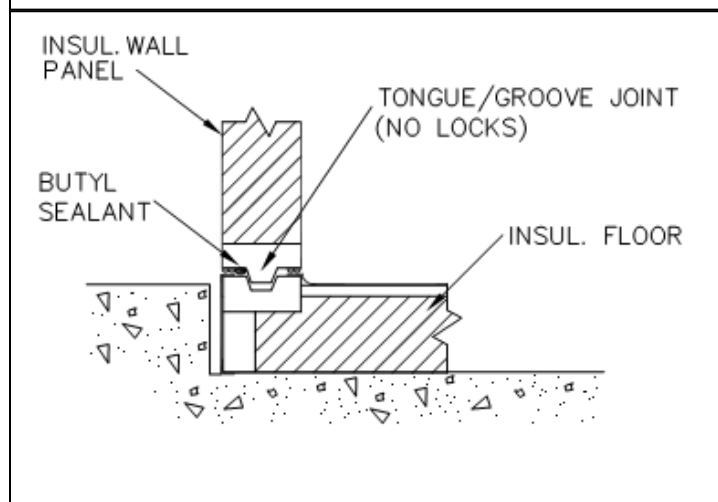


Due to continuous improvement programs, specifications are subject to change without notice.

WALL ON CONCRETE FLOOR COOLERS

STANDARD SCREED

CONCEALED STRIP SCREED


N.S.F. COVED BASE IS OPTIONAL
INDOOR USE ONLY

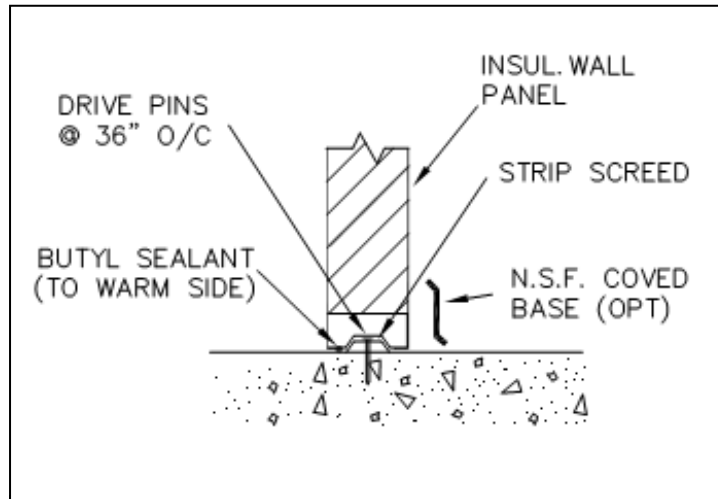

OPTIONAL SCREED

PVC CHANNEL SCREED

MEETS N.S.F. REQUIREMENTS
INDOOR USE ONLY

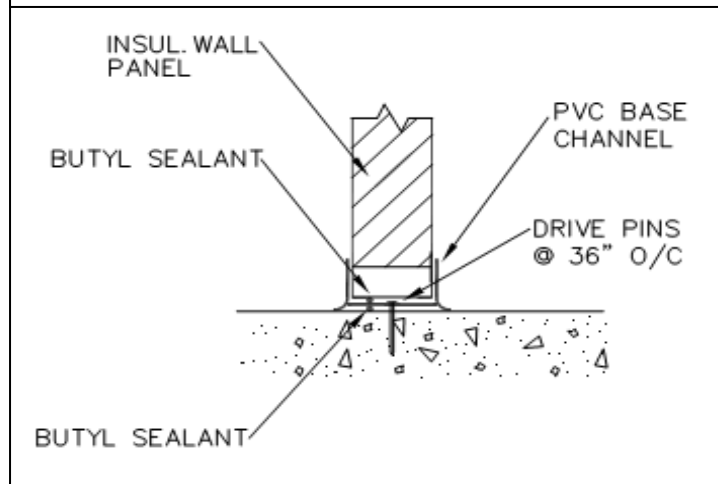


OPTIONAL SCREED

ANGLE BASE

MEETS HIGH SEISMIC REQUIREMENTS

N.S.F. COVED BASE IS OPTIONAL

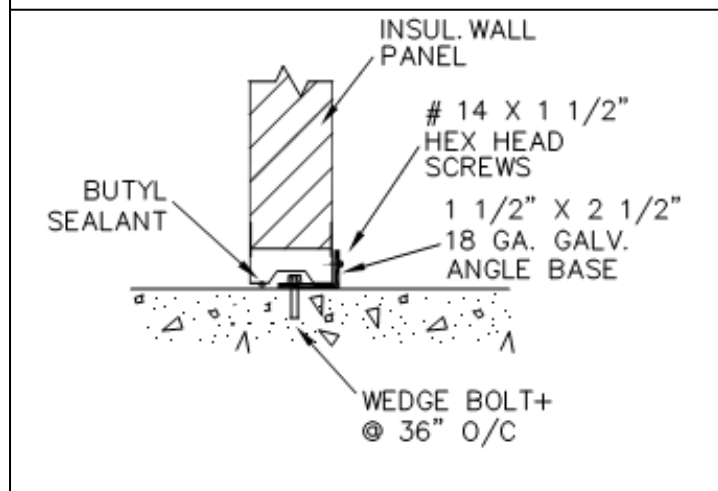


Due to continuous improvement programs, specifications are subject to change without notice.

WALL TO FLOOR-INSULATED SLAB FREEZERS

STANDARD SCREED

CONCEALED STRIP SCREED


N.S.F. COVERED BASE IS OPTIONAL
INDOOR USE ONLY

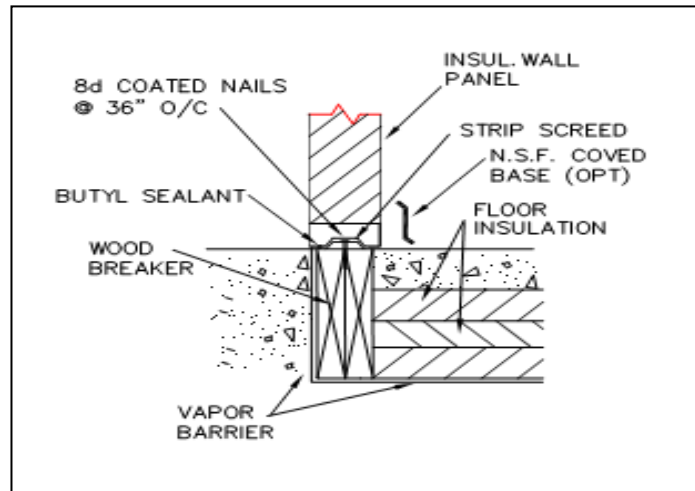

OPTIONAL SCREED

PVC CHANNEL SCREED


MEETS N.S.F. REQUIREMENTS
INDOOR USE ONLY

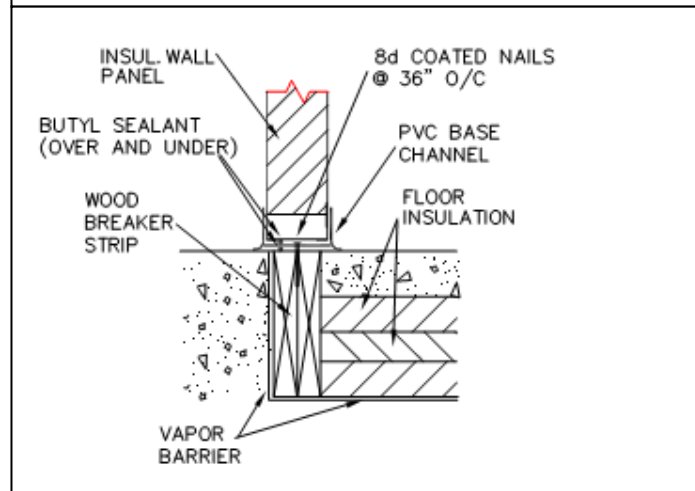

OPTIONAL SCREED

ANGLE BASE

MEETS HIGH SEISMIC REQUIREMENTS

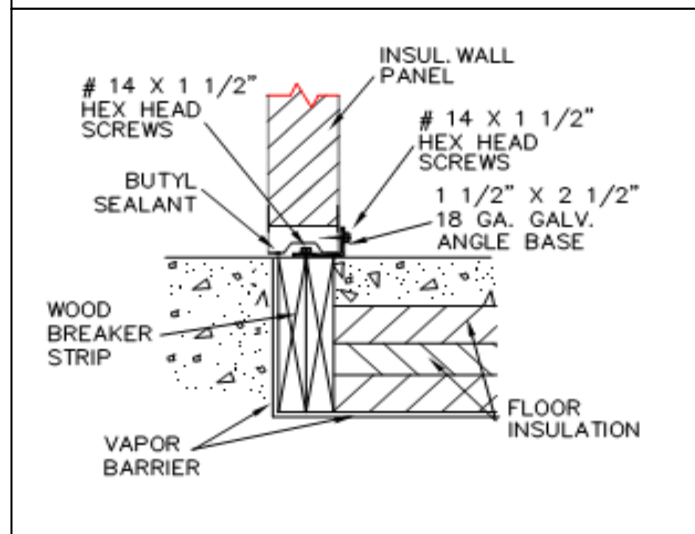

PER DOE R-28 MINIMUM FLOOR INSULATION IS REQUIRED

SLAB DETAILS ARE FOR GENERAL REFERENCE ONLY! DETAILS SHOULD NOT BE USED IN THE DESIGN OR PREPERATION OF THE INSULATED SLAB WITHOUT HAVING IT REVIEWED BY A QUALIFIED ENGINEER.

Due to continuous improvement programs, specifications are subject to change without notice.


STANDARD CURB APPLICATIONS

CURBS ARE POURED IN PLACE
AFTER WALLS ARE INSTALLED


THIS METHOD ELIMINATES CURB
BLOCK-OUTS, WALL OFFSET AND
DOOR LOCATION PROBLEMS

ANGLE IS 1 1/2" X 1 1/2" 18 GA.
GALVANIZED STEEL

COOLER WALL WITH POURED IN
PLACE CURBS

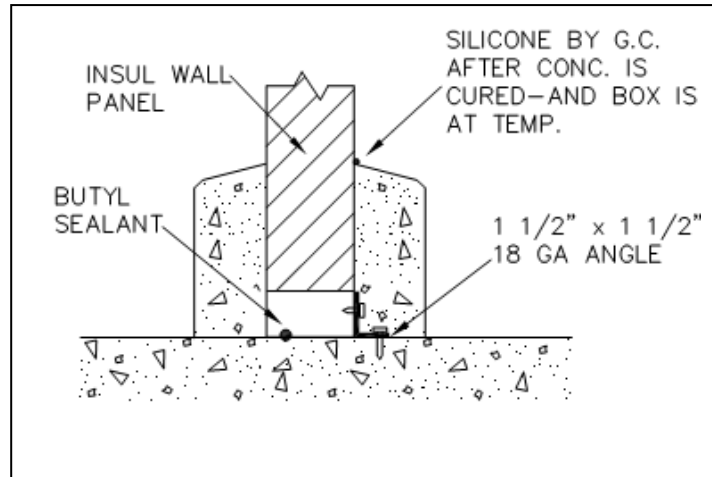


FREEZER WALL ON INSULATED
SLAB WITH POURED IN PLACE
CURBS

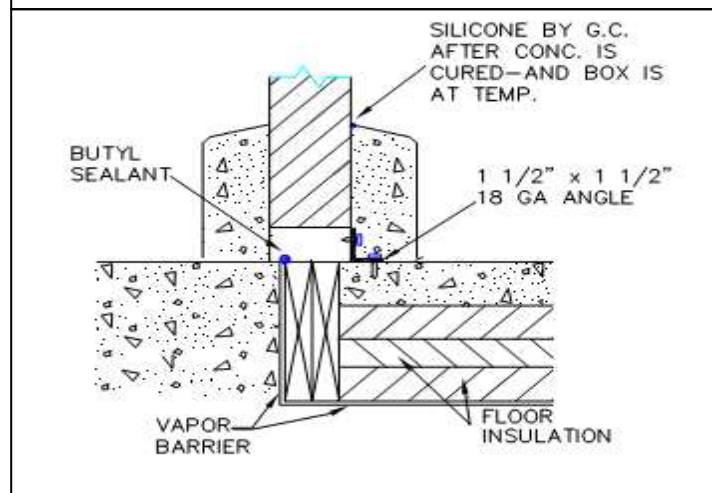

FREEZER WALL IN "PIT"
INSULATED SLAB AND CURBS
ARE POURED IN PLACE AFTER
WALLS ARE INSTALLED

NOT RECOMMENDED FOR OUTDOOR
APPLICATIONS

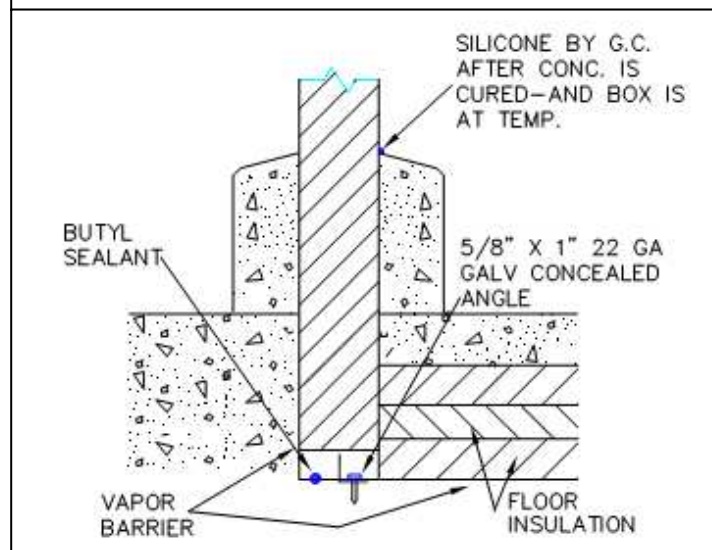


Due to continuous improvement programs, specifications are subject to change without notice.

COOLER WALL ON CURB

STANDARD SCREED

CONCEALED STRIP SCREED


N.S.F. COVERED BASE IS OPTIONAL
INDOOR USE ONLY

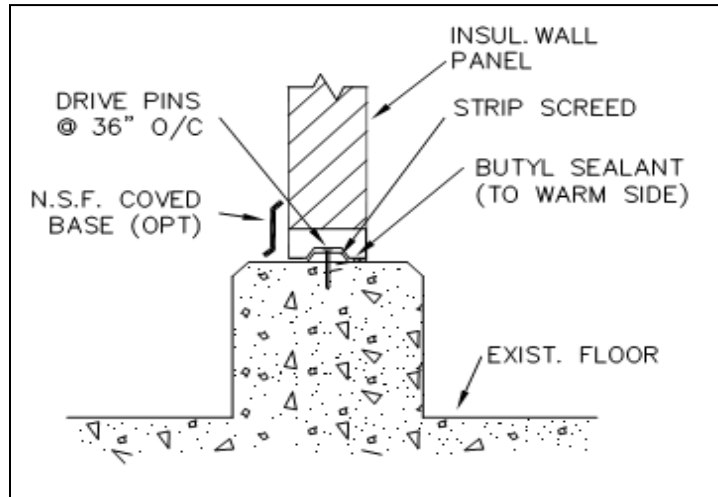

OPTIONAL SCREED

PVC CHANNEL SCREED

MEETS N.S.F. REQUIREMENTS
INDOOR USE ONLY

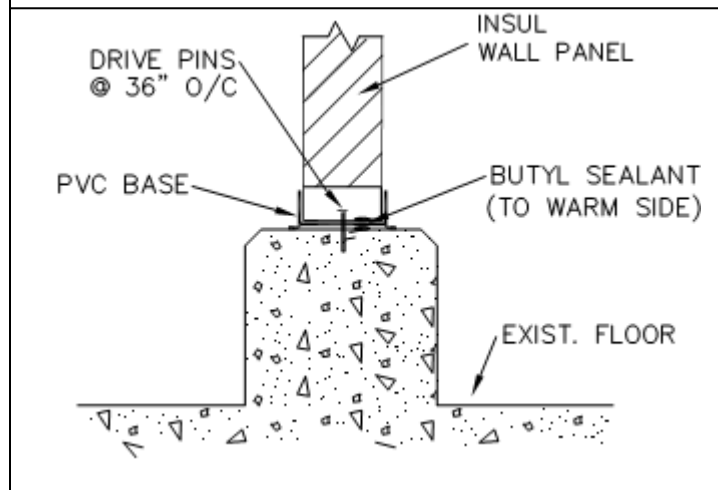


OPTIONAL SCREED

ANGLE BASE

ANGLE IS:
1 1/2" X 2 1/2" 18 GA.
GALVANIZED STEEL

N.S.F. COVERED BASE IS OPTIONAL
MEETS HIGH SEISMIC REQUIREMENTS

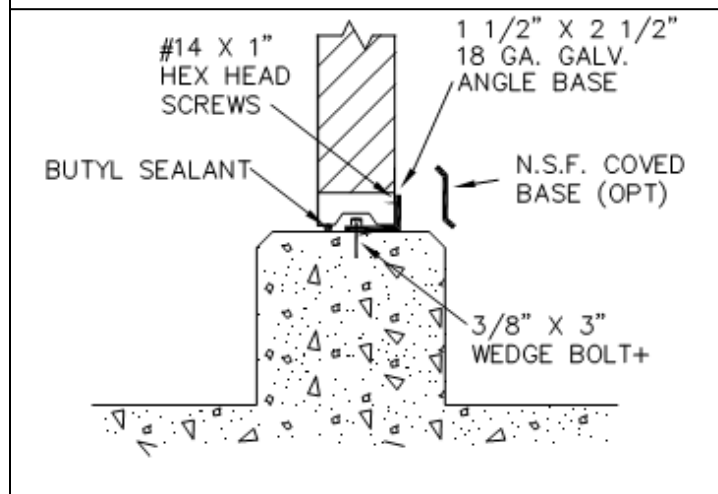


Due to continuous improvement programs, specifications are subject to change without notice.

FREEZER WALL ON CURB-INSULATED SLAB

STANDARD SCREED

CONCEALED STRIP SCREED


N.S.F. COVED BASE IS OPTIONAL
INDOOR USE ONLY

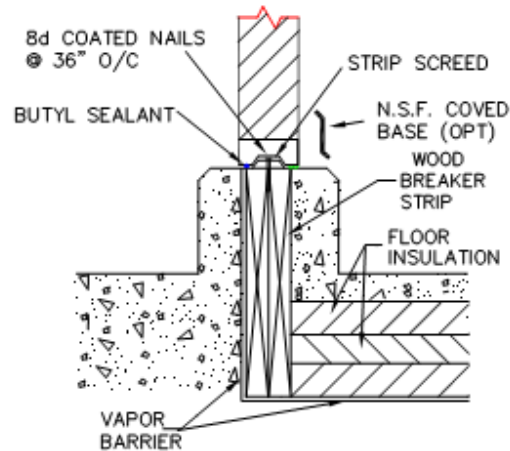

OPTIONAL SCREED

PVC CHANNEL SCREED

MEETS N.S.F. REQUIREMENTS
INDOOR USE ONLY

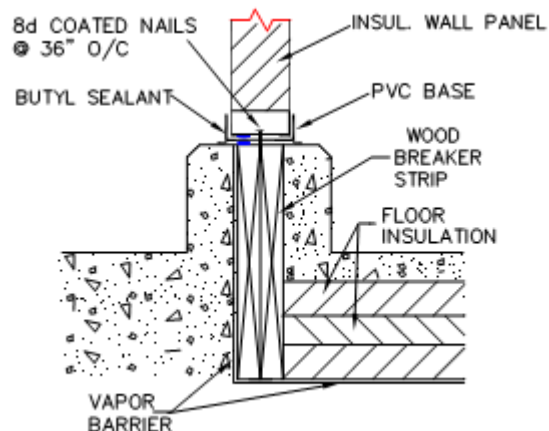


OPTIONAL SCREED

ANGLE BASE

ANGLE IS:
1 1/2" X 2 1/2" 18 GA.
GALVANIZED STEEL

N.S.F. COVED BASE IS OPTIONAL
MEETS HIGH SEISMIC REQUIREMENTS

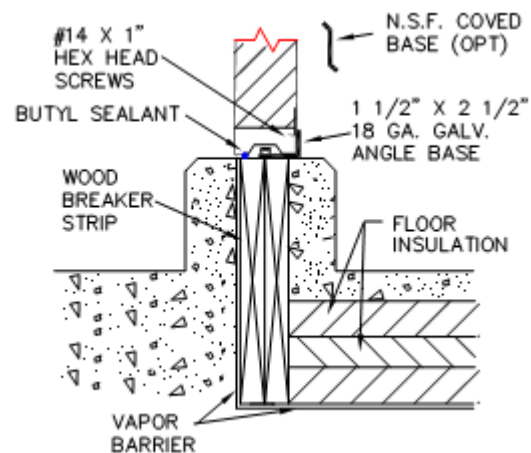


Due to continuous improvement programs, specifications are subject to change without notice.

WALL INTERSECTIONS


CAM-LOCK WALL TO ADJOINING
UNIT CORNER PANEL

CORNER PANEL MEETS
N.S.F. REQUIREMENTS

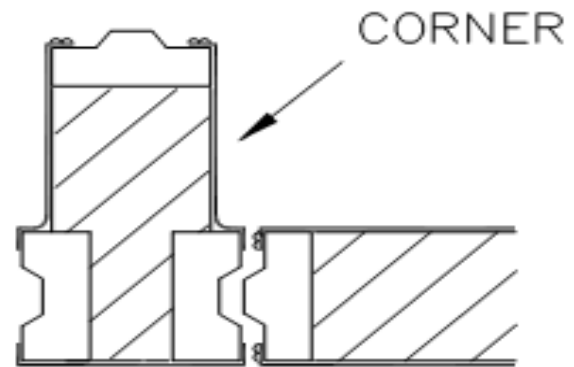

CAM-LOCK PARTITION WALL
TO PERIMETER WALL


"T" PANELS MEET N.S.F. REQUIREMENTS

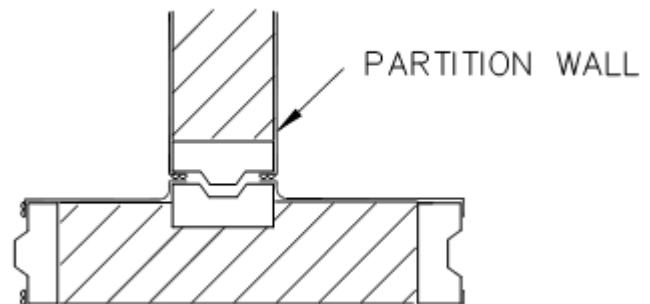

WALL PANEL TO EXISTING WALL

2" PLANT-ON IS FASTENED TO
EXISTING WALL. (WOOD BLOCKING)
NEW PANEL IS
CAM-LOCKED TO PLANT-ON

NOT NSF APPROVED

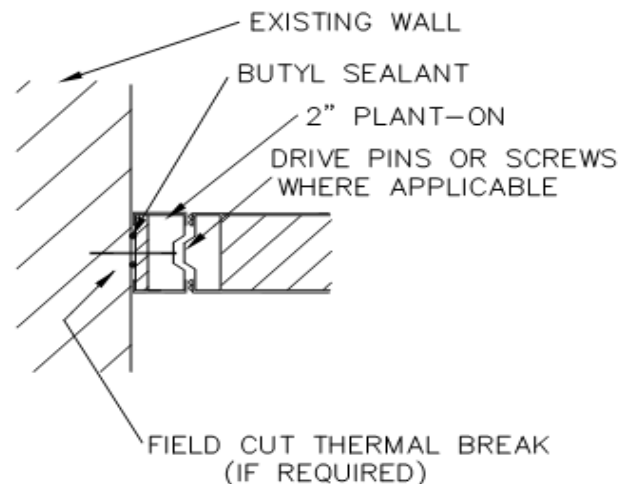

Due to continuous improvement programs, specifications are subject to change without notice.


TOP TO PERIMETER WALL

STANDARD APPLICATION

LAG BOLTS ARE USED TO
FASTEN TOP TO PERIMETER WALL

TOP TRIM IS FIELD INSTALLED


BUTYL SEALANT AT ALL
JOINTS IN FREEZER

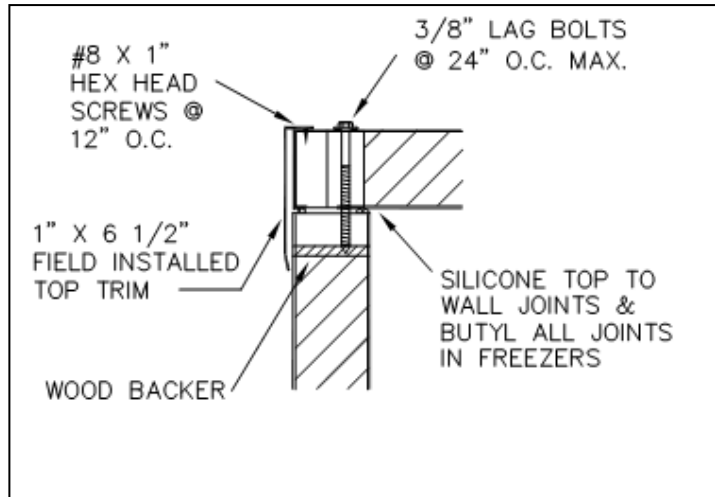

OPTIONAL LOCK-DOWN TOPS


WHEN CLEARANCE ABOVE UNIT DOES
NOT ALLOW FOR LAG BOLTING

FACTORY CAPPED TOPS (SHOWN)
IS OPTIONAL

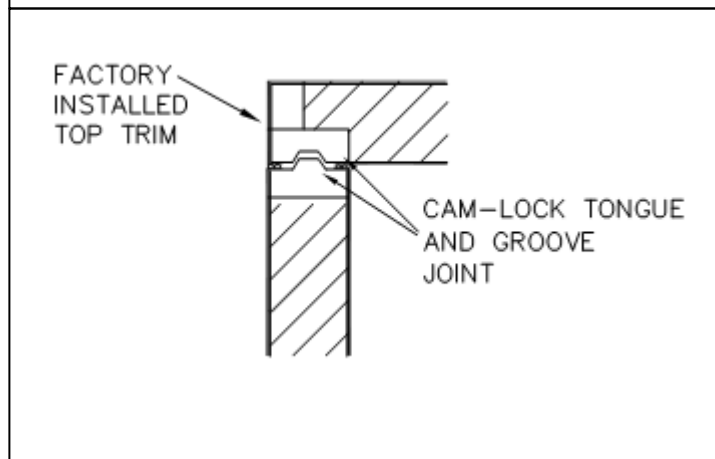

ALTERNATE TOP FASTENING

WHEN CLEARANCE ABOVE TOPS
DOES NOT ALLOW STANDARD
LAG DOWN APPLICATION, A
CONTINUOUS 14 GA. GALV. ANGLE
MAY BE INSTALLED INSIDE UNIT
TO FASTEN TOPS TO WALL

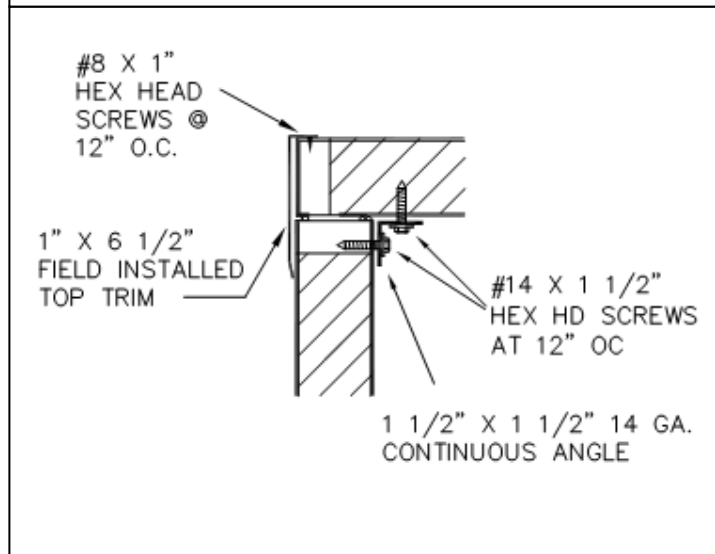

TOP TO PARTITION


LAG BOLTS ARE USED TO
FASTEN TOP TO PARTITION WALL

BUTYL SEALANT AT ALL
JOINTS IN FREEZER

TYPICAL APPLICATION FOR TOPS OF UNEQUAL THICKNESS

5" TOPS ARE LAGGED TO 5" WALL
3 1/2" TOPS ARE CAM-LOCKED
TO 5" TOPS


WHEN CLEARANCE ABOVE TOPS
DOES NOT ALLOW STANDARD
LAG DOWN APPLICATION, A
CONTINUOUS 14 GA. GALV. ANGLE
MAY BE INSTALLED INSIDE UNIT
TO FASTEN TOPS TO WALL

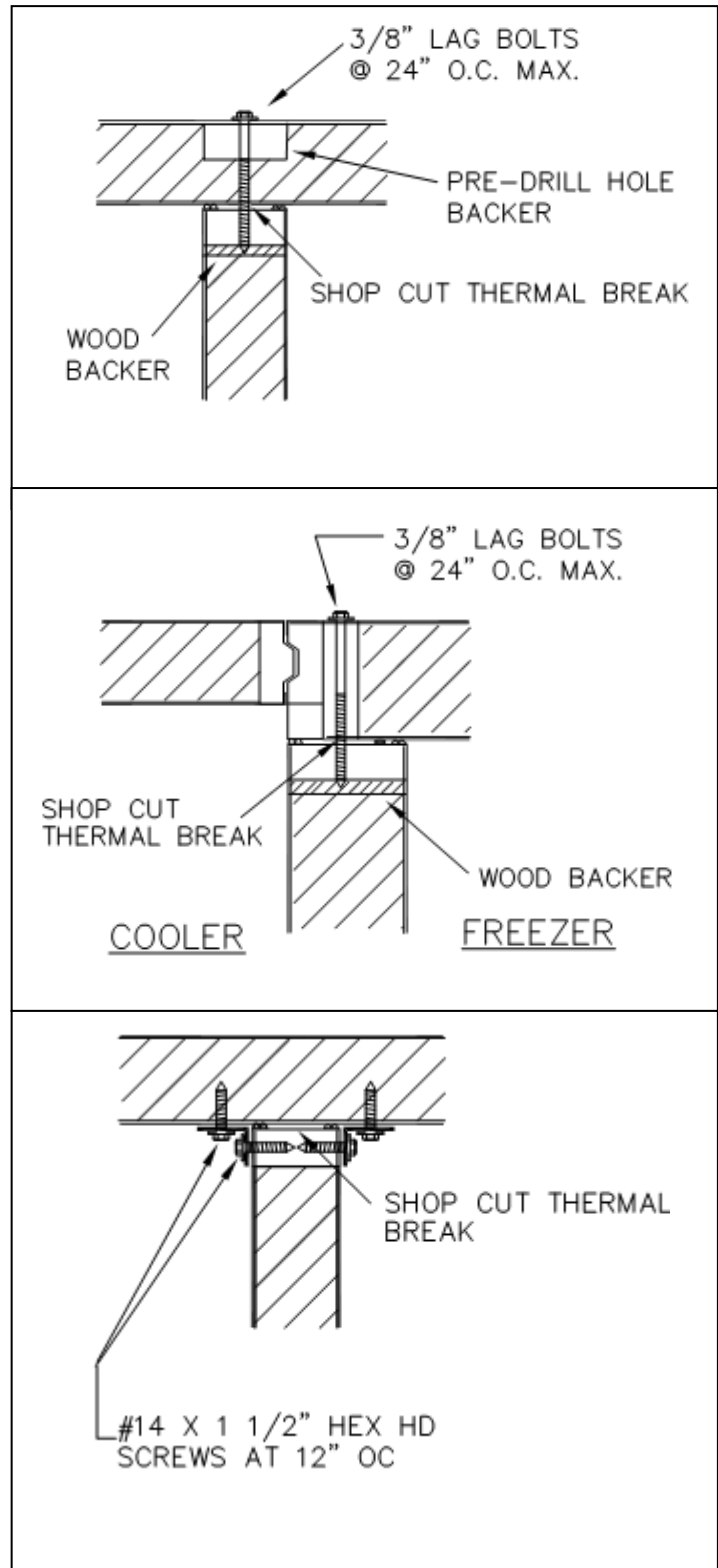


Due to continuous improvement programs, specifications are subject to change without notice.

TOP SUPPORT


TOP SUPPORT AT
EXISTING WALL

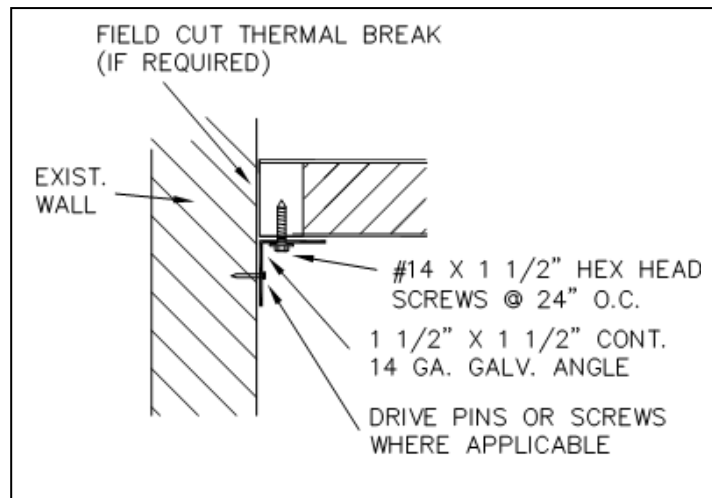

TOP SUPPORTED BY
BEAMS AND COLUMNS

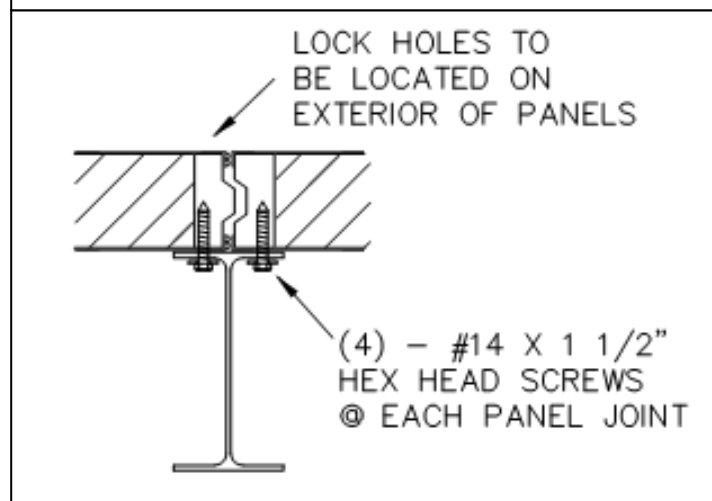

TOP SUPPORTED BY
EXTERIOR CHANNELS

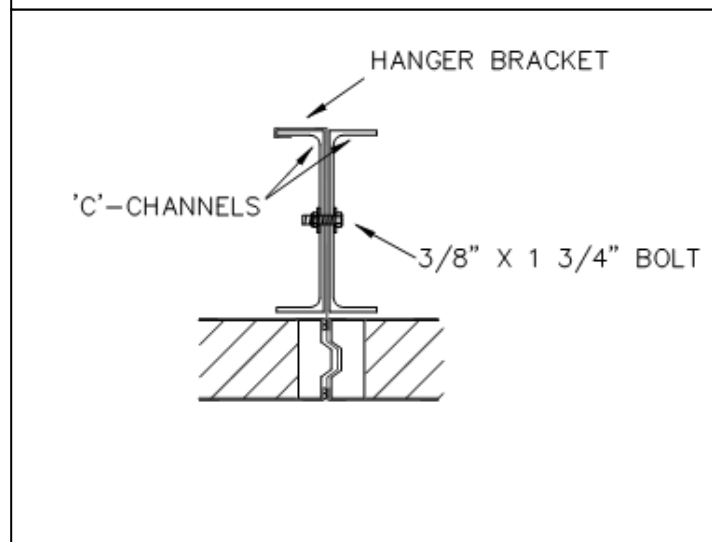


Due to continuous improvement programs, specifications are subject to change without notice.

SUSPENDED TOPS


STANDARD SUSPENDED TOPS:

12 GA. WIRE IS WRAPPED AROUND BAR JOIST OR 1" PIPE (BY OTHERS) BETWEEN BAR JOISTS.

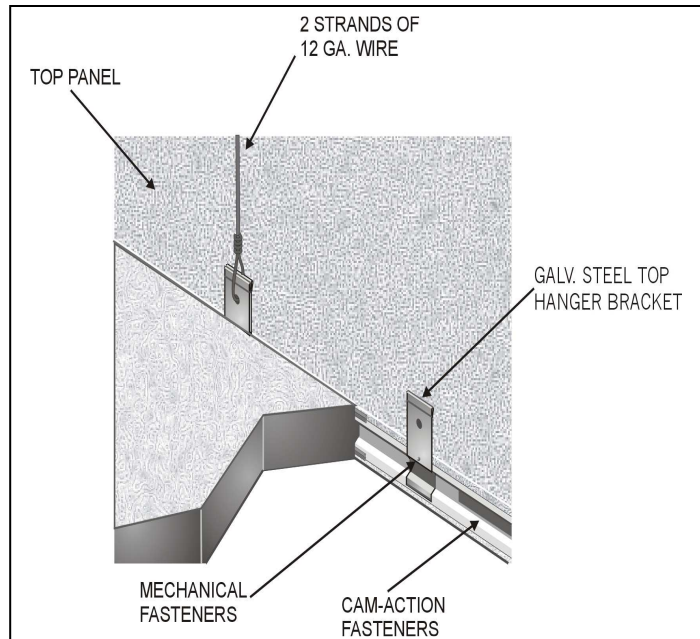


OPTIONAL SUSPENDED TOPS:

ALL THREAD ROD FITS BETWEEN BOTTOM ANGLES OF BAR JOISTS AND IS FASTENED IN PLACE WITH NUT AND WASHER

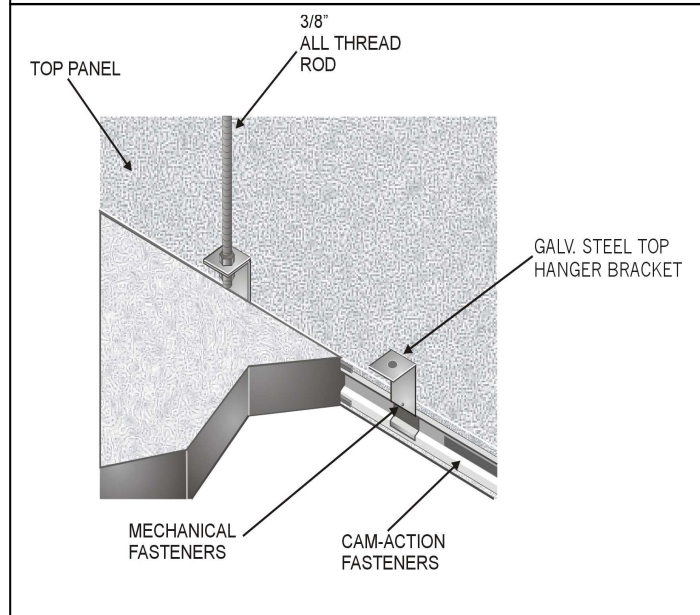

Due to continuous improvement programs, specifications are subject to change without notice.

TRIM DETAILS

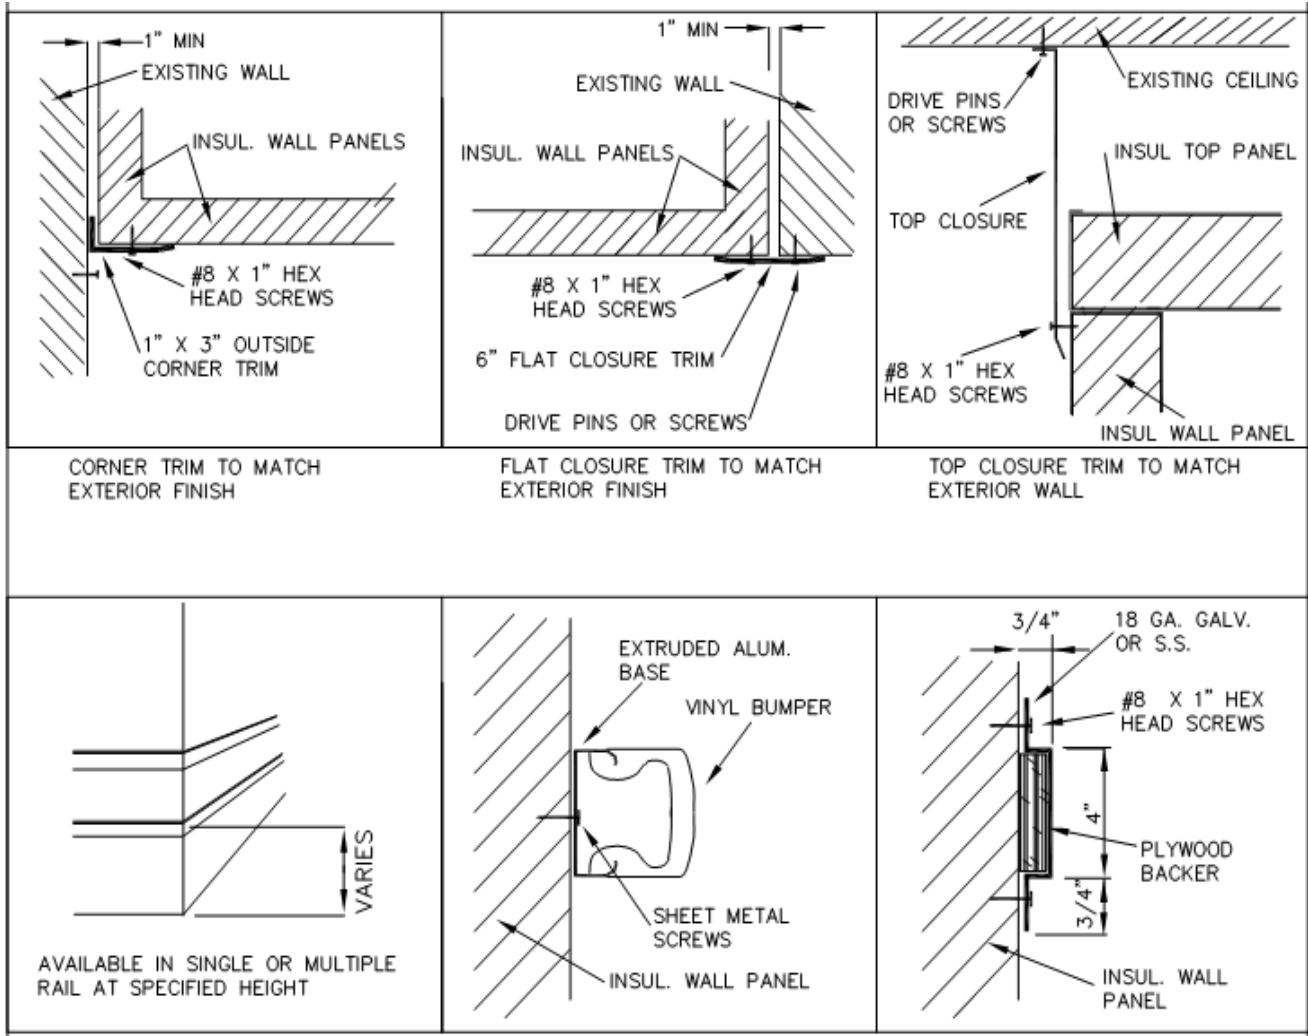

OPTIONAL BUMPER RAILS FOR WALL PROTECTION

Due to continuous improvement programs, specifications are subject to change without notice.